

Durable, Strong Roof and Wall Sheets



TATA BLUESCOPE STEEL

COLORing lives in steel

Made in India with 150 years of
Global Research
with Legacy of Trust & Quality



2021 & 2018



2020 & 2019





2018 & 2014



2018 & 2017

India's Most Trusted Brand

DURASHINE® Roof

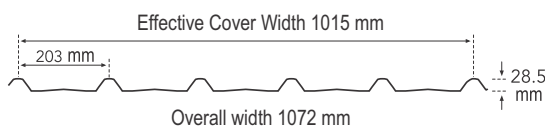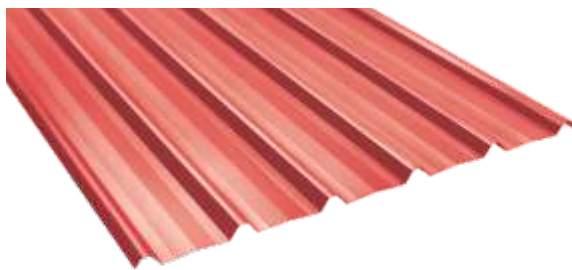

Roof Specifications

Total Painted Thickness (mm)	0.37 / 0.47 / 0.52 / 0.62
Sheet length* (mm)	2440 (8ft), 3050 (10ft), 3660 (12ft), 4270 (14ft), 4880 (16ft), 5490 (18ft), 6100 (20ft), 6710 (22ft), 7320 (24ft)
Effective cover width (mm)	Nominal 1015
Overall width (mm)	Nominal 1072
Minimum roof slope (degrees)	5

* Sheet length in feet is approximate value

Maximum Support Spacing (mm)*



Type of Span	Roof	Wall
Single Span	950	1700
End Span	1200	2450
Internal Span	1750	2850

* Terms and conditions applicable

Anti-capillary Groove: Anti-capillary grooves ensure leak-proof performance

Wider Valleys : Wider valleys ensure higher water discharge during heavy rains

DURASHINE® Wall

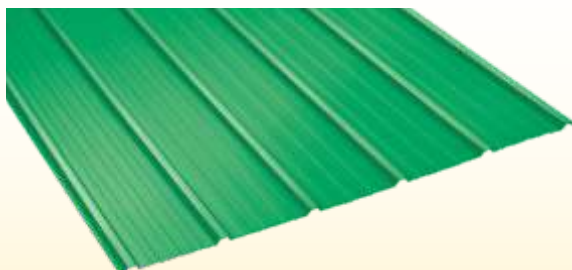

Wall Specifications

Total Painted Thickness (mm)	0.37 / 0.47 / 0.52 / 0.62
Sheet length* (mm)	2440 (8ft), 3050 (10ft), 3660 (12ft), 4270 (14ft), 4880 (16ft), 5490 (18ft), 6100 (20ft), 6710 (22ft), 7320 (24ft)
Effective cover width (mm)	Nominal 1110
Overall width (mm)	Nominal 1150

* Sheet length in feet is approximate value

Maximum Support Spacing (mm)*

Type of Span	Wall
Single Span	1150
End Span	1500
Internal Span	1650

* Terms and conditions applicable

Widest Profile: DURASHINE® wall is one of the widest wall profile sheets available, which is also quick and easy to install

DURASHINE® Roof & Wall

Available Standard Colours*

Asian White™

Cool Blue™

Nuvo Blue™

Bright Green™

Pearl Green™

Castle Red™

Passion Red™

Cherry Red™


Coffee™

Smart Grey™

Benefits of DURASHINE® Roof & Wall

Long Lasting	High Strength (Min. 550MPa)	Better Thermal Efficiency
<ul style="list-style-type: none"> Zinc-Aluminum alloy coating provides excellent corrosion resistance compared to galvanized steel Its superior paint system gives longer product life over pre-painted galvanized steel The profiles last 2-4 times longer than ordinary colour coated sheets 	<ul style="list-style-type: none"> Manufactured from high strength raw materials Saves overall cost of supporting structures. Light weight makes it easy to handle Longer span and wider spread allow design freedom 	<ul style="list-style-type: none"> DURASHINE® profiles have high heat reflectivity thereby making it an energy efficient solution It maintains inside temperature cooler as compared to galvanized sheets, asbestos sheets, concrete slab and clay tiles

DURASHINE® Typical Accessories

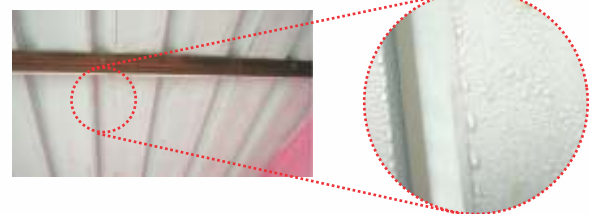

Disclaimer on Condensation:

Condensation is the natural formation of water droplets on the bottom side of any installed metal roofing sheet. It may occur when there is a difference in temperature between the air in the building and the sheet itself, causing the water vapour (moisture) in the air to condense on the inside of the sheet. It is a natural phenomenon and hence no claims will be entertained in this regard.

The risk of condensation may be minimised by providing proper ventilation arrangement in the roofs and by using suitable insulation.



Instructions for fasteners: Use carbon free washers with class 3 fasteners for installing DURASHINE® roofs and accessories



Maintenance Recommendation: Clean and maintain your roof regularly to remove dust and dirt.